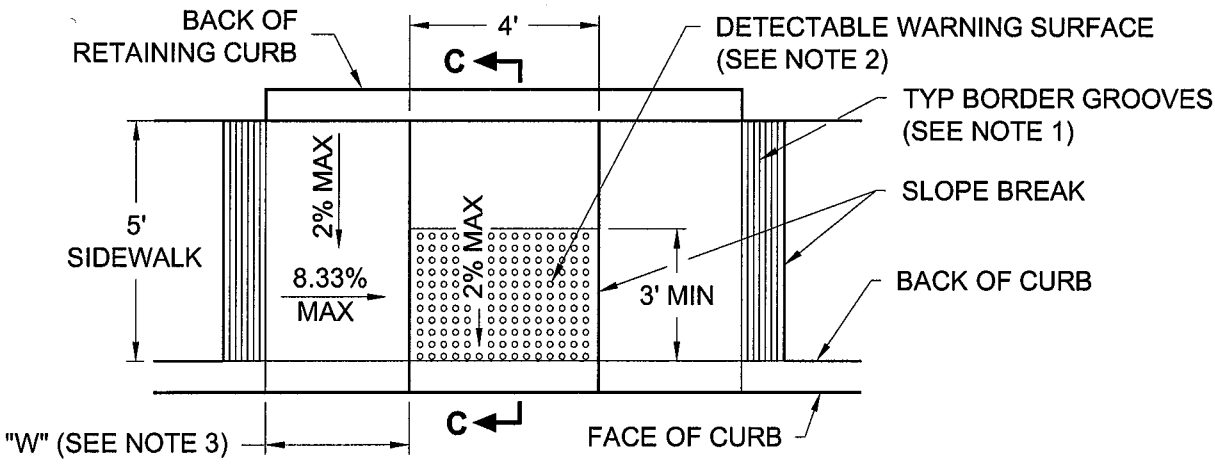

TYPE "C"

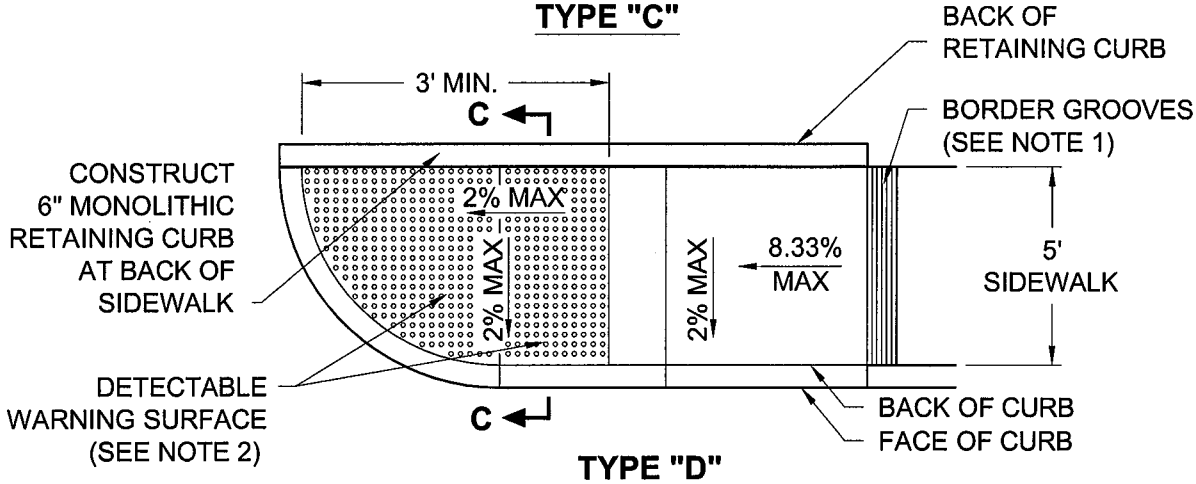

TYPE "D"

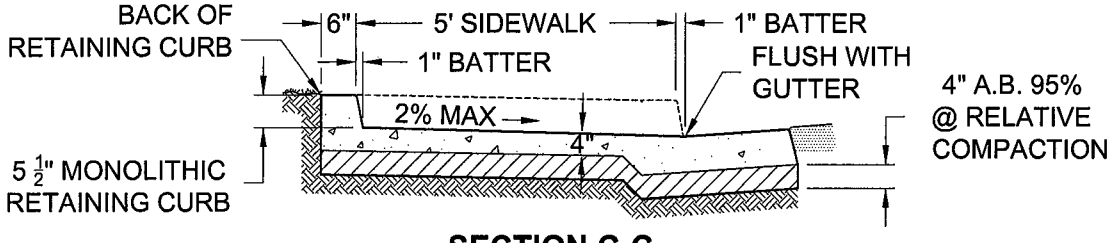

SECTION C-C

NOTES:

1. CURB RAMPS SHALL HAVE A 12" WIDE BORDER WITH 1/4" GROOVES APPROX 3/4" O.C. AT LEVEL SURFACE OF THE SIDEWALK. SEE GROOVING DETAIL ON ST-21c.
2. CURB RAMPS SHALL HAVE A DETECTABLE WARNING SURFACE. SEE NOTE 11 ON ST-21d FOR DETECTABLE WARNING SURFACES AND TRUNCATED DOME GENERAL INFORMATION.
3. "W" = CURB HEIGHT MAX SLOPE DIMENSION (SEE TABLE ON ST-21d).
4. SEE ST-21d & ST-21e FOR ADDITIONAL HANDICAP RAMP NOTES.

(Not To Scale)

REGISTERED PROFESSIONAL ENGINEER
BALWINDER S. GREWAL
No. 49122
Exp. 9-30-08
CIVIL
STATE OF CALIFORNIA

PUBLIC WORKS DEPARTMENT

THE CITY OF BRENTWOOD

HANDICAP RAMP TYPE "C" & "D"

BALWINDER S. GREWAL CITY ENGINEER

DATE:	APRIL 16, 2008
REVISED:	JULY 22, 2008

SHEET NO. **ST-21b**