




SURFACE APPLIED TILE INSTALLATION

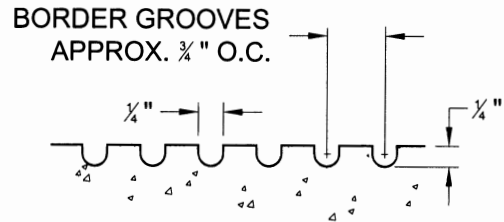

GROOVING DETAIL

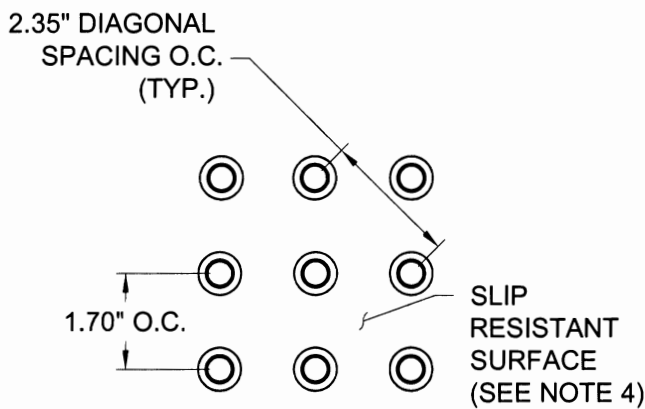

RAISED TRUNCATED DOME PATTERN

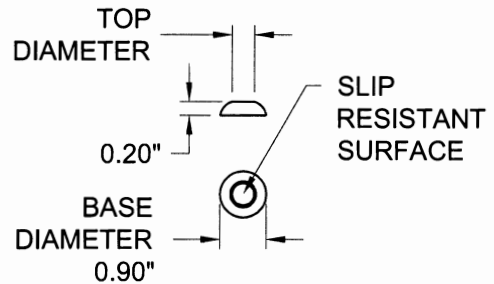

RAISED TRUNCATED DOME

NOTES:

1. APPLY PERIMETER SEALANT AT PERIMETER OF PLASTIC TILE AFTER FASTENING. TOOL SMOOTH TO BLEND TILE EDGE WITH ADJACENT SURFACE.
2. STRUCTURAL ADHESIVE AT FULL PERIMETER AND THROUGH CENTER OF PLASTIC TILE EACH WAY.
3. 1/4" x 1 1/2" LG COLOR MATCHED EXPANSION ANCHOR PART NO. ADA-S-FASTN 12" O.C.
4. SLIP RESISTANT PLASTIC TILE SURFACE. PLASTIC TILES WITH A MIN. OF 40 POINTS PER SQUARE INCH.
5. SEE ST-21d & ST-21e FOR ADDITIONAL HANDICAP RAMP NOTES.

(Not To Scale)



**PUBLIC WORKS
DEPARTMENT**



HANDICAP RAMP DETAILS

Balwinder S. Grewal
BALWINDER S. GREWAL CITY ENGINEER

DATE: OCT. 31, 2000
REVISED: APRIL 27, 2007

SHEET NO.
ST-21c