


CUT BANKS

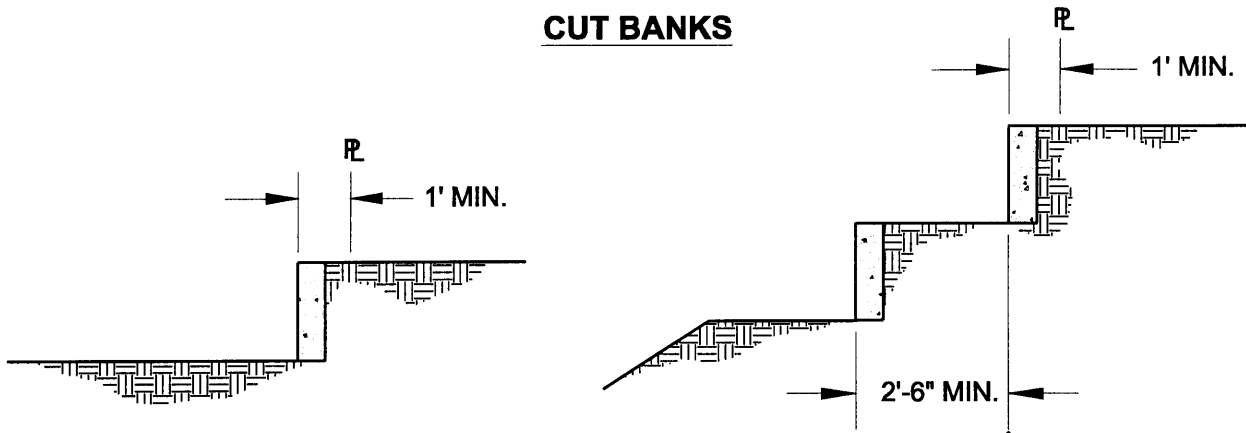

RETAINING WALLS

NOTES:

1. RETAINING WALLS HIGHER THAN 1' SHALL BE REINFORCED CONCRETE, CONCRETE BLOCKS, OR MASONRY.
2. ALL RETAINING WALLS SHALL BE APPROVED BY THE CITY ENGINEER.
3. FOR LOTS TO BE IN CONFORMANCE WITH FHA, NO DOUBLE RETAINING WALLS SHALL BE CONSTRUCTED ON SIDE YARDS.

(Not To Scale)



**ENGINEERING
DEPARTMENT**

INTERIOR PROPERTY LINE GRADING

John E. Stevenson
JOHN E. STEVENSON CITY ENGINEER

DATE: NOV. 30, 1998

REVISED:

SHEET NO.

G-2