


**DETACHED CURB AND SIDEWALK**

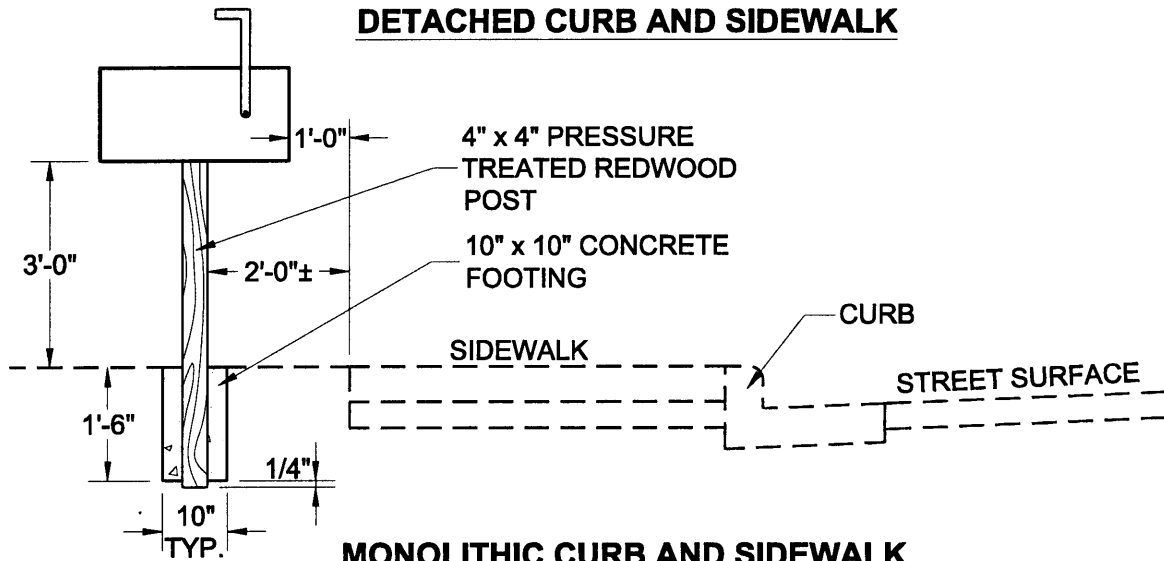

**MONOLITHIC CURB AND SIDEWALK**

**NOTES:**

1. MAINTAIN A MINIMUM 3'-0" HORIZONTAL CLEARANCE FROM FIRE HYDRANT TO NEAREST EDGE OF MAILBOX.
2. MAILBOX LOCATION SHALL BE SUCH AS TO NOT OVERHANG UTILITY OR WATER METER BOXES.
3. MAILBOX CLUSTERS, AND LOCATIONS, ARE SUBJECT TO POSTAL REGULATIONS AS SAID REGULATIONS OCCUR.

(Not To Scale)



**ENGINEERING  
DEPARTMENT**

**MAILBOX LOCATION**

*John E. Stevenson*  
JOHN E. STEVENSON  
CITY ENGINEER

DATE: NOV. 30, 1998  
REVISED:

SHEET NO.  
**ST-18**